
Isolamento termico – K200 CAM

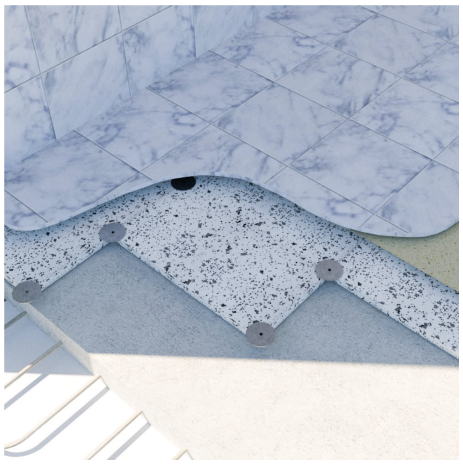

Features

Pannello termoisolante in polistirene espanso sinterizzato di bianco puntinato, realizzato con le migliori materie prime italiane. Il prodotto è indicato per la zoccolatura e per applicazioni dove è richiesta un'elevata resistenza alla compressione. Colore: grigio/bianco

Dimension

lunghezza: 2000 mm ÷ 100 mm. Larghezza: 1500 mm ÷ 100 mm. Spessore: 1000 mm ÷ 20 mm Conducibilità termica: W/mK ≥ 0,032 Resistenza alla compressione al 10% di deformazione kPa ≥ 200 Resistenza a trazione perpendicolare alle facce: kPa ≥ 100

Product informations

Commercial name: Isolamento termico - K200 CAM
Material: EPS
PSV MixEco

Waste type	Waste origin	Recycled total	Post-consumer recycled	Pre-consumer recycled	By-product total	External by-product	Internal by-product	Virgin material
--	--	15%	15%	--	--	--	--	85%

Productor informations

POLISETTE SRL
VIA SAN VITALE, 15, SALA, Cremona, Lombardia, Italia
Telephone: 0521 833694
Mail: andrea.azzali@teampolisette.com
Website: https://www.polisette.it/

November 12, 2024