Isolamento termico – Sicuro FERTIGBAU34

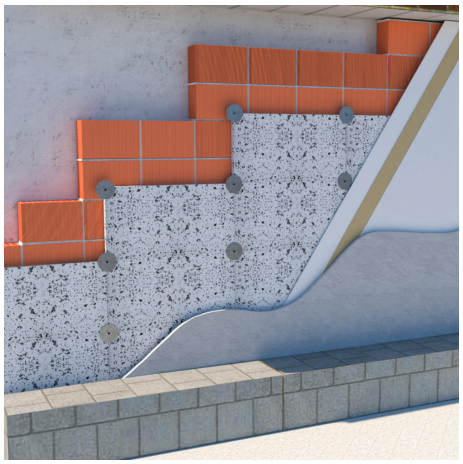

Features

Pannello termoisolante in polistirene espanso sinterizzato a celle chiuse di colore bianco puntinato realizzato con le migliori materie prime italiane, consigliato per la realizzazione dell'isolamento termico di pareti esterne. Il pannello el€ indicato per applicazioni di isolamento termico a cappotto, in quanto rispetta i requisiti minimi previsti dal sistema ETICS. Colore: bianco/grigio

Dimension

lunghezza: 2000 mm ÷ 100 mm. Larghezza: 1500 mm ÷ 100 mm. Spessore: 1000 mm ÷ 20 mm Conducibilità termica: W/mK ≥ 0,036 Resistenza a trazione perpendicolare alle facce: kPa ≥ 100

Product informations

Commercial name: Isolamento termico - Sicuro FERTIGBAU34
Material: EPS

Waste type	Waste origin	Recycled total	Post-consumer recycled	Pre-consumer recycled	By-product total	External by-product	Internal by-product	Virgin material
--	--	15%	15%	--	--	--	--	85%

Productor informations

POLISETTE SRL
VIA SAN VITALE, 15, SALA BAGANZA, Parma, Emilia Romagna, Italia
Telephone: 0521 833694
Mail: andrea.azzali@teampolisette.com
Website: https://www.polisette.it/

December 17, 2025